



A B C D E F G H

接线图
Wiring Diagram



规格 SPECIFICATIONS

1	相数 Number of Phase	2
2	步距角 Step Angle	1.8° ±5%
3	保持力矩 Holding Torque	68 Kg. cm
4	电压 Voltage	3.25 VDC
5	电流 Current	5.0 A
6	相电阻 Phase Resistance (20°C)	0.65 ±10% Ω
7	相电感 Phase Inductance (1KHz)	3.6 ±20% mH
8	转子惯量 Rotor Inertia	3550 g · cm ²
9	绝缘电阻 Insulation Resistance	100M Ω 500VDC
10	绝缘等级 Insulation Class	B (130°C)
11	环境温度 Ambient Temperature	-20°C to 50°C
12	环境湿度 Ambient Humidity	15% to 95%
13	电机重量 Motor Weight	Approx 3.8 kg
14	减速比 Reduce Ratio	10:1

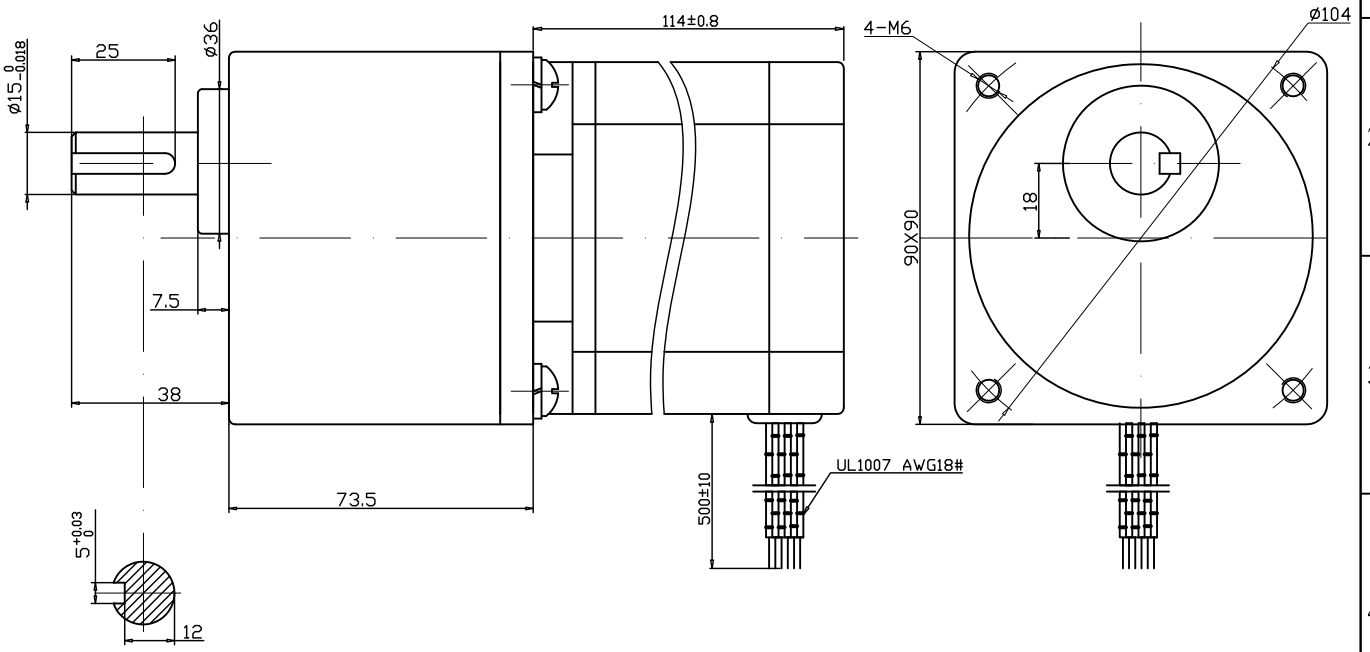

励磁顺序 (2相励磁)
EXITING SEQUENCE (2 PHASE)

STEP	A	B	\bar{A}	\bar{B}	CCW
1	+	+	-	-	↑
2	-	+	+	-	
3	-	-	+	+	
4	+	-	-	+	↓

NOTE: This document is released for information only. Its reproduction in whole or in part or its dissemination to third parties is prohibited. Unless otherwise specified all trademarks and registered trademarks appearing on this document are the property of changzhou chuangwei motor & electric apparatus co., ltd.

6			Unit:mm 第一角画法 First angle method 未注线性与角度尺寸公差 Tolerances for linear and angular dimensions without individual tolerance indications GB/T 1804-m eqv ISO 2768-1:m 未注形状与位置尺寸公差 Geometrical tolerances for features without individual tolerance indications GB/T 1184-k eqv ISO 2768-2:k	设计 DESIGN	XH	20160702	CW-motor	常州创伟电机电器有限公司 Changzhou Chuangwei Motor & Electric Apparatus Co., Ltd	
				校核 CHECK					
				工艺 TECHNOLOGY					TYPE: HYBRID STEPPING MOTOR
				标准化 STANDARD					SCALE XX Rev. 1.0 SHEET 1 OF 1
				批准 APPROVE					Model: 86BHH114-500A-5GU10K
	V1.0	HTPS1611222	20161123	UNLESS OTHERWISE SPECIFIDE	NAMES	SINGATURE	DATE		
	REV.	版本记录 REVISION RECORD	DATE						

A B C D E F G H